

Assistant Commissioner For Patents
Washington, D.C. 20231

05/20/99

Transmitted herewith for filing is the patent application of:

Inventor: Kwan-Ho ChanFor: APPARATUS AND METHOD FOR LIGAMENT FIXATION

Enclosed are:

- ☒ 13 sheets of drawings.
- ☐ An assignment of the invention to: _____
- ☒ A verified statement to establish small entity status.
- ☐ _____

The filing fee has been calculated as shown below:

For:	No. Filed	No. Extra	Small Entity		Large Entity	
			Rate	Fee	Rate	Fee
Basic Fee				\$ 380.00		\$
Total Claims	28 - 20	8	x \$ 9.00	72.00	x \$18.00	
Ind. Claims	2 - 3	0	x \$39.00	0.00	x \$78.00	
Mult. Claims			+ \$130.00		+ \$260.00	
Total				\$ 452.00	Total \$	

- ☐ Please charge my Deposit Account No. 16-0221 to cover the filing fee and assignment recording fee. A duplicate copy of this sheet is enclosed.
- ☒ A check in the amount of \$452.00 to cover the filing fee (~~and assignment recording fee~~) is enclosed.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 16-0221. A duplicate copy of this sheet is enclosed.
- ☒ Any additional filing fees required under 37 CFR 1.16.
- ☒ Any patent application processing fees under 37 CFR 1.17.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 16-0221. A duplicate copy of this sheet is enclosed.
- ☒ Any patent application processing fees under 37 CFR 1.17.
- ☐ The issue fee set in 37 CFR 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR 1.311(b).
- ☒ Any filing fees under 37 CFR 1.16 for presentation of extra claims.

Respectfully submitted,

M. Pandiscio 5/20/99Pandiscio & Pandiscio
470 Totten Pond Road
Waltham, Massachusetts 02451-1914
Tel. (781) 290-0060

MR/CHAN23.FEE

CHAN-23

05/20/99
jc520 U.S. PTO

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of: Kwan-Ho Chan
For: APPARATUS AND METHOD FOR
LIGAMENT FIXATION
Attorney's Docket No.: CHAN-23

Date: May 20, 1999

BOX PATENT APPLICATION
Assistant Commissioner For Patents
Washington, D.C. 20231

Sir:

FILING OF PATENT APPLICATION UNDER 37 CFR 1.10

The attached application is being filed under the provisions of 37 CFR 1.10.

Applicant's attorney is also submitting the requisite fee as calculated on the attached transmittal letter.

Respectfully submitted,

Mark J. Pandiscio 5/20/99

Mark J. Pandiscio
Reg. No. 30,883
Pandiscio & Pandiscio
470 Totten Pond Road
Waltham, MA 02451-1914
(781) 290-0060

MR/CHAN23.FIL

"EXPRESS MAIL" MAILING LABEL NUMBER

EJ097469681 US

DATE OF DEPOSIT

MAY 20, 1999

I HEREBY CERTIFY THAT THIS PAPER OR FEE IS BEING DEPOSITED WITH THE UNITED STATES POSTAL SERVICE "EXPRESS MAIL POST OFFICE TO ADDRESSEE" SERVICE UNDER 37 CFR 1.10 ON THE DATE INDICATED ABOVE AND IS ADDRESSED TO THE ASSISTANT COMMISSIONER FOR PATENTS, WASHINGTON, D.C. 20231.

MARK J. PANDISCIO

(PERSON MAILING)

Mark J. Pandiscio 5/20/99

(SIGNATURE)

CHAN-23

jc511 U.S. PTO
09/315918
05/20/99

097469681-052099

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of: Kwan-Ho Chan
Title: APPARATUS AND METHOD FOR LIGAMENT
FIXATION
Attorney's Docket No.: CHAN-23

Assistant Commissioner For Patents
Washington, D.C. 20231

VERIFIED STATEMENT CLAIMING SMALL BUSINESS ENTITY
STATUS - INDEPENDENT INVENTOR

I, Kwan-Ho Chan, a citizen of Canada residing at Lubbock, Texas, as the inventor named in the above-identified application, hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for the purposes of paying reduced fees under Title 35, United States Code, Sections 41(a) and (b), to the United States Patent and Trademark Office with regard to the invention described and claimed in the above-identified U.S. Patent Application; that I have not assigned, granted, conveyed or licensed, nor based upon information and belief am I under any obligation under contract or law to assign, grant, license or convey any rights in said invention to any person who could not likewise be classified as an independent inventor if that person had made the invention, or to any concern which would not qualify as a small business concern or a nonprofit organization as defined in 37 CFR 1.9(d) and (e), respectively.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Title 18, United States Code, Section 1001, and that such willful false statements may jeopardize the validity of the above-identified application, any patent issuing thereon, or any patent to which this verified statement is directed.

Date: May 19, 1999

Kwan-Ho Chan
Kwan-Ho Chan

APPLICATION
FOR
UNITED STATES LETTERS PATENT

PATENT APPLICATION

SPECIFICATION

TO ALL WHOM IT MAY CONCERN:

Be it known that Kwan-Ho Chan of Lubbock, Texas has
invented certain improvements in APPARATUS AND METHOD FOR
LIGAMENT FIXATION of which the following description is a
specification.

MR/CHAN23.CVR

APPARATUS AND METHOD FOR LIGAMENT FIXATION

Reference to Earlier Applications

This application claims the benefit of:

5 1. United States Provisional Patent
Application Serial No. 60/086,329, filed May 21, 1998
by Kwan-Ho Chan for APPARATUS AND METHOD FOR LIGAMENT
FIXATION; and

10 2. United States Provisional Patent
Application Serial No. 60/125,745, filed March 23, 1999
by Kwan-Ho Chan for APPARATUS AND METHOD FOR LIGAMENT
FIXATION.

Field Of The Invention

15 The present invention relates to surgical
apparatus and methods in general, and more particularly
to apparatus and methods for fixing a ligament in a
bone tunnel.

Background Of The Invention

20 The use of interference screws to fix the ends of
a bone-tendon-bone complex to the walls of bone tunnels
is well known in the art. It is generally accepted

that an interference screw provides sufficient fixation
of a bone block in a bone tunnel to allow for early
rehabilitation after ligament surgery, such as in
anterior cruciate ligament (ACL) reconstruction
surgery.

Some techniques avoid using a bone block to fix a
ligament in a bone tunnel. Referring to Fig. 1, one
such technique involves suspending a ligament L in a
bone tunnel C with a pull-through suture S. Over time,
the ligament L and surrounding bone grow together,
fixing the ligament L in place.

Note: As used herein, the term "ligament L" is
meant to refer to the replacement ligament being fixed
in a bone tunnel. To that end, the replacement
ligament L might comprise:

1. ligament or tendon or other tissue
harvested from the patient's own tissue (known as
autograft tissue); or

2. ligament or tendon or other tissue
harvested from another human donor (known as allograft
tissue); or

3. ligament or tendon or other tissue
harvested from an animal source (know as xenograft
tissue); or

4. ligament or tendon or other tissue made
by tissue engineering; or

5. prosthetic ligament made of artificial
material; or

6. a combination of the above.

Referring to Fig. 2, another technique uses an
interference screw to directly fix ligaments without a
bone block (such as a semitendonosis and gracilis
tendons) to the walls of the bone tunnel. In this
case, the ligament L may be towed into place with
suture S, which normally is removed after interference
screw fixation has been achieved. However, one
disadvantage of direct fixation of the ligament in a
bone tunnel with an interference screw is the risk of
slippage of the ligament under load prior to the
ligament healing to the bone. Such slippage may occur
during the rehabilitative period when the ligament is
subjected to repetitive loading. To provide for a
sufficient interference fit, a large interference screw
may be required. However, these large interference

screws may cause necrosis of the tendon because of excessive compression of the ligament against the bony tunnel wall.

5 Objects Of The Invention

One object of the present invention is to provide an improved apparatus and method to augment the interference screw fixation of a ligament in a bone tunnel.

10 Another object of the present invention is to provide an improved apparatus and method to resist slippage of the ligament in a bone tunnel under cyclic loading.

15 Yet another object of the present invention is to provide an improved apparatus and method for fixing a ligament in a bone tunnel without excessive sideways pressure on the ligament that may result in tissue necrosis.

20 Summary Of The Invention

The present invention provides a jamming retainer to augment the interference screw fixation of a ligament in a bone tunnel, whereby resistance to

slippage of the ligament under static and cyclic loading is improved. The invention also provides a jamming retainer for fixing a ligament in a bone tunnel without excessive sideways pressure on the ligament that may result in tissue necrosis. The jamming retainer includes a substantially rigid body with a bore or loop for attaching a ligament or tendon to the jamming retainer. The jamming retainer has a bore or ring for receiving a suture for towing the jamming retainer and ligament or tendon through a bone tunnel. Once the jamming retainer and ligament have been positioned within the bone tunnel, e.g., by towing, the ligament is fixed by insertion of an interference screw to compress the ligament sideways against the wall of the bone canal. However, as noted above, fixation achieved solely by engagement of the interference screw against the ligament is sometimes inadequate; however, with the present invention, this fixation is significantly improved through the use of the jamming retainer in one of two ways. In the first mode, sometimes hereinafter referred to as the "blocking mode", the interference screw is advanced into the bone

tunnel so as to be just touching, or just short of touching, the jamming retainer. Any subsequent proximal slippage of the ligament will draw the jamming retainer against the distal tip of the interference screw. Further slippage of the ligament is then prohibited by the jamming retainer abutting against the interference screw. In the second mode, sometimes hereinafter referred to as the "sideways compression mode", the interference screw is advanced until the interference screw engages the jamming retainer and pushes the jamming retainer sideways, thus causing the jamming retainer to be partially embedded in the wall of the bone tunnel. Thus, the jamming retainer is fixed in position by its engagement with the interference screw and the wall of the bony tunnel.

Brief Description Of The Drawings

Fig. 1 is a schematic representation of a tendon drawn into a bone tunnel with a pull-through suture;

Fig. 2 is a schematic representation of direct fixation of a ligament in a bone tunnel using an interference screw;

Figs. 3 and 4 are front elevational, and vertical cross-sectional detail views, respectively, of an embodiment of a jamming retainer;

Figs. 5 and 6 are schematic representations of a tendon being attached, and snugged, respectively, to the jamming retainer of Figs. 3 and 4;

Figs. 7 and 8 are schematic representations of a tendon, attached to the jamming retainer of Figs. 3 and 4, drawn into a bone tunnel with a pull-through suture, and secured in the bone tunnel with an interference screw, respectively;

Figs. 9 and 10 are front elevational, and vertical cross-sectional detail views, respectively, of another embodiment of a jamming retainer;

Figs. 11 and 12 are schematic representations of a tendon being attached, and snugged, respectively, to the jamming retainer of Figs. 9 and 10;

Figs. 13 and 14 are front elevational, and vertical cross-sectional detail views, respectively, of an additional embodiment of a jamming retainer;

Figs. 15 and 16 are schematic representations of a tendon being attached, and snugged, respectively, to the jamming retainer of Figs. 13 and 14;

Figs. 17 and 18 are schematic representations of a tendon, attached to the jamming retainer of Figs. 13 and 14, drawn into a bone tunnel with a pull-through suture, and secured in the bone tunnel with an interference screw, respectively;

Fig. 19 is a schematic representation of an alternate embodiment for a spherical jamming retainer;

Fig. 20 is a schematic representation of an alternate embodiment for a spherical jamming retainer enhancing fixation of a ligament using an interference screw;

Fig. 21 is a front view of an alternate embodiment for a jamming retainer with an incorporated retaining loop;

Fig. 22 is a side view of an alternate embodiment for a jamming retainer with an incorporated retaining loop;

Fig. 23 is a schematic side view of a spherical jamming retainer with a loop for a pull-through suture, and a retaining loop, incorporated therewith;

Fig. 24 is a front view of an alternate embodiment for a jamming retainer with an incorporated retaining loop;

Fig. 25 is a side view of an alternate embodiment for a jamming retainer with an incorporated retaining loop;

Fig. 26 is a schematic side view showing a spherical jamming retainer with transverse bores for passage of sutures;

Fig. 27 is a partial sectional view of fixation apparatus formed in accordance with the present invention;

Fig. 28 is a sectional view of a suture retainer portion of the fixation apparatus shown in Fig. 28;

Fig. 29 is a schematic representation of a tendon attached to a fixation device and drawn into a bone tunnel with a pull-through suture;

Fig. 30 is a schematic representation of the present invention enhancing fixation of a ligament using an interference screw;

Fig. 31 is a side elevational view of a ligament inserter; and

Fig. 32 is a schematic representation of a ligament inserter inserting a ligament attached to a jamming retainer into a bone tunnel.

Description Of The Preferred Embodiments

The present invention works in conjunction with a standard interference screw such as a Bioscrew (made by Linvatec) or an RCI screw (made by Smith and Nephew).

The invention provides a jamming retainer which is attached to a ligament. The jamming retainer is positioned in a bone tunnel, and then, preferably, secured relative to the walls of the bone tunnel with an interference screw. More particularly, in one preferred embodiment, the interference screw urges the jamming retainer laterally against, and into, the wall of the bone tunnel. Interference between the jamming retainer and the walls of the bone tunnel fixes the ligament in the bone tunnel without ligament necrosis.

The interference screw also bears some of the load imparted on the jamming retainer by the ligament during normal use of the joint. Thus, even if the interference screw does not create a direct fixation between the jamming retainer and the wall of the bone tunnel, any slippage of the ligament will cause the jamming retainer to abut against the interference screw and thus any further slippage is prohibited. Thus, by

closely positioning the jamming retainer and interference screw in the bone tunnel slippage of the ligament can be substantially prohibited. The jamming retainer may bear some or all of the load of the ligament, depending on the degree of direct fixation of the ligament imparted by the interference screw (and depending on the degree of the load carried by the suture).

Referring to Figs. 3 and 4, one embodiment of a jamming retainer 100 is a substantially rigid spherical body with longitudinal bores 105 for receiving suture. As shown in Figs. 5 and 6, suture S passes through one longitudinal bore 105, encircles a ligament L, and passes through the other longitudinal bore 105. Once the ligament is snugged against the jamming retainer 100, as shown in Fig. 6, the suture is secured with a knot 110.

Referring to Figs. 7 and 8, once the ligament L and jamming retainer 100 are secured, the ends of the suture S may be used to tow the jamming retainer 100 and ligament L into position in a bone tunnel C. Once positioned, as shown in Fig. 8, an interference screw I traps, secures or fixes the position of the jamming

retainer 100 (and thus the ligament L) in the bone tunnel C. In the event that the interference screw I is inserted just short of contact with the jamming retainer 100, the ligament L may slip slightly with load applied to it. The ligament slippage will cause the jamming retainer 100 to migrate towards the interference screw I. Further migration of the ligament L and the jamming retainer 100 is prevented when the jamming retainer 100 abuts against the interference screw I.

The interference screw I encroaches the wall of the bone tunnel C, thus fixing the position of the interference screw I relative to the bone tunnel C. Preferably, the interference screw I is inserted sufficiently far into bone tunnel C to urge the jamming retainer 100 laterally so as to encroach the wall of the bone tunnel C, thus securely fixing the position of the jamming retainer 100 (and hence the ligament L) relative to the bone tunnel C.

Referring to Figs. 9 and 10, another embodiment of a jamming retainer 200 is a substantially rigid spherical body with longitudinal bores 205 for receiving suture. As shown in Figs. 11 and 12, suture

S passes through one longitudinal bore 205, encircles a ligament L, and passes through the other longitudinal bore 205. The jamming retainer 200 has a recess 215, which complements the shape of a folded ligament, as shown in Fig. 12. Once the ligament is snugged against the jamming retainer 200, the suture is secured with a knot 210.

Similar to the jamming retainer 100 as shown in Figs. 7 and 8, once the ligament L and jamming retainer 200 are secured, the ends of the suture S may be used to tow the jamming retainer 200 and ligament L into position in a bone tunnel C. Once positioned, an interference screw I traps, secures or fixes the position of the jamming retainer 200 (and thus the ligament L) in the bone tunnel C.

Referring to Figs. 13 and 14, a further embodiment of the invention is a threaded-body jamming retainer 300 of substantial rigidity with longitudinal bores 305 for receiving sutures. As shown in Figs. 15 and 16, suture S passes through one longitudinal bore 305, encircles a ligament L, and passes through the other longitudinal bore 305. Once the ligament is snugged

against the jamming retainer 300, as shown in Fig. 16, the suture is secured with a knot 310.

Referring to Figs. 17 and 18, once the ligament L and jamming retainer 300 are secured, the ends of the suture S may be used to tow the jamming retainer 300 and ligament L into position in a bone tunnel C. Once positioned, an interference screw I traps, secures or fixes the position of the jamming retainer 300 (and thus the ligament L) in the bone tunnel C. In one preferred embodiment of the invention, the geometry of the threads of jamming retainer 300 corresponds to the geometry of the threads of interference screw I, whereby jamming retainer 300 and interference screw I can be intermeshed with one another (e.g., in the manner shown in Fig. 18) if so desired.

One modification of the present invention is the provision of one or more transverse holes or loops in the jamming retainer, through which the ligament and/or sutures can be threaded. In this case, retaining sutures and the suture retainer (see Figs. 27-30) would not be required.

Such an alternative embodiment is shown in Fig. 19, where the jamming retainer 400 is in the form of a

sphere, and where a bore 405 in the upper part of the sphere is provided for engagement of the pull-through suture S. The ligament L is passed through a bore 410 (or a loop, described below) that is incorporated as part of the retainer 400.

When the interference screw I is advanced, as shown in Fig. 20, it will push the spherical retainer 400 sideways and cause it to be partially embedded in the soft cancellous bone of the bone tunnel C. Alternatively, advancement of interference screw I may be stopped short of causing lateral movement of spherical retainer 400, in which case interference screw I will simply trap the spherical retainer in the bone tunnel.

Referring to Figs. 21 and 22, an additional embodiment of the present invention provides a threaded-body jamming retainer 500 of substantial rigidity, where a bore 505 in the upper part of the jamming retainer 500 is provided for engagement of a pull-through suture (not shown). A ligament (also not shown) is passed through a bore 510 incorporated as part of the retainer 500.

Referring to Fig. 23, another embodiment of the invention includes a spherical jamming retainer 600, where a ring 605 in the upper part of the jamming retainer 600 is provided for engagement of a pull-through suture S. A ligament L is passed through a loop 610 incorporated as part of the retainer 600.

Referring to Figs. 24 and 25, an additional embodiment of the invention provides a threaded-body jamming retainer 700 of substantial rigidity, where a bore 705 in the upper part of the jamming retainer 700 is provided for engagement of a pull-through suture (not shown). A ligament (also not shown) is passed through a loop 710 incorporated as part of the retainer 700.

The ligaments may be tied to yet another embodiment of a jamming retainer 800, shown in Fig. 26. A suture S_T is used for towing the jamming retainer 800 through a bone tunnel. A suture S_L is used for retaining a ligament L to the jamming retainer 800.

In another form of the invention, a jamming retainer 900 includes two parts: a substantially rigid threaded body 905 and a suture retainer part 910, both shown in Fig. 27. The threaded body 905 is tapered

externally on one end 915. The external threads have the same pitch as a mating interference screw I (shown in Fig. 30). The threaded body 905 has a partially tapered bore 920 complementary to the tapered body 925 of the suture retainer part 910 (Fig. 28). The partially tapered bore is widest at the end 930 opposite to the externally tapered end 915. The suture retainer part 910 has a tapered body 925 to fit inside the partially tapered bore 920 of the threaded body 905. A ring part 935 (Figs. 27 and 28) is for retaining suture S_L tied to the ligament L. One or two #2 sutures maybe used. The ring part 935 is also for passage of the pull-through suture S_T .

It should be noted that the complementary taper of the bore 920 of the threaded body 905, and the tapered body 925 of the suture retainer 910, helps to protect the knot 940 of the retaining suture S_L . Tension in the suture S_L distal to the tip of tapered body 905 will tend to draw the suture retainer 910 farther into the tapered bore 920. This will cause increased binding of the portion of the suture S_L as it is squeezed between the wall of the tapered body 910 and

the wall of the tapered bore 920, thus resisting
slippage of the suture S_L and protecting the knot 940.

Referring also to Figs. 29 and 30, as the
interference screw I is advanced from below, it first
engages the ligament L, compressing it against the wall
of the bone tunnel C. The interference screw I also
engages the wall of the bone tunnel C, both by
threading mechanics and also by compression of the
cancellous bone of the bone tunnel C. As the
interference screw I is advanced farther, it engages
the threaded body of the jamming retainer 900. As the
combined width of the interference screw and the
jamming retainer is much larger than the diameter of
the bone tunnel C, the advancing interference screw I
pushes the jamming retainer 900 sideways. As the
jamming retainer 900 is urged sideways, the threads in
the threaded body 905 become embedded in the cancellous
bone of the bone tunnel C. The engagement of the
jamming retainer with the wall of the bone tunnel C,
and with the threads of the interference screw I,
enhances the fixation of the ligament L via the
retaining sutures S_T and S_L .

The two disadvantages of the two-piece jamming retainer 900 are:

1. valuable surgery time is taken up in tying the retaining sutures; and
2. the knots may loosen.

Thus, it is advantageous during manufacture to provide a means for engaging the ligament. This can be in the form of a transverse bore, as shown in Fig. 19, or in the form of a bore or loop incorporated as part of the jamming retainers, as shown in Figs. 21-25. The bore can be an integral part of the jamming retainer, as shown in Figs. 21 and 22. A flexible loop made of suture material such as Dacron or other suture material can be incorporated into the retainer during manufacture of the retainer of Figs. 23-25.

The jamming retainer can be made of metal, plastic or bioabsorbable materials.

Although the threaded cylindrical shape, and the non-threaded spherical shape, of the jamming retainer are illustrated here, jamming retainers of other shapes are also possible.

Although the various embodiments of jamming retainer have been shown to have different shapes, it

is to be appreciated that all the embodiments disclosed will function both in the blocking mode and in the sideways compression mode so as to enhance fixation of the ligament L in the bone tunnel.

5 Referring to Figs. 31 and 32, rather than towing a jamming retainer and ligament into position, which necessitates additional incisions and increased drilling, the jamming retainer and ligament may be pushed into position with a ligament inserter LI. The
10 ligament inserter LI comprises a handle H, a slender shaft T and means for engaging the jamming retainer or the distal portion of the ligament. The ligament inserter LI uses prongs P_1 and P_2 for maintaining the jamming retainer or ligament during insertion of the
15 jamming retainer and ligament in a bone tunnel. As shown in Fig. 32, the ligament L, having been attached to a jamming retainer J, is urged with the jamming retainer through a bone tunnel C. The jamming retainer may then be secured in the bone tunnel using an
20 interference screw in the manner previously discussed.

What Is Claimed Is:

1. An apparatus for fixing a ligament or tendon
in a bone tunnel comprising a jamming retainer adapted
to retain the ligament or tendon, said jamming retainer
being substantially rigid.

2. The apparatus of claim 1, wherein said
jamming retainer is fixable in a bone tunnel with an
interference screw.

3. The apparatus of claim 1, said jamming
retainer having one or more of a longitudinal bore, a
transverse bore or a ring for receiving a suture.

4. The apparatus of claim 1, said jamming
retainer including a loop for receiving a ligament or
tendon.

5. The apparatus of claim 4, wherein said loop
is pliable.

6. The apparatus of claim 1, said jamming
retainer having a transverse bore for receiving a
ligament or tendon.

5 7. The apparatus of claim 1, wherein said
jamming retainer has a spherical shape.

10 8. The apparatus of claim 1, said jamming
retainer having a recess adapted to complement a shape
of the ligament or tendon.

15 9. The apparatus of claim 1, said jamming
retainer having exterior threads.

20 10. The apparatus of claim 9, wherein said
threads correspond to threads of an interference screw
adapted to fix said jamming retainer in the bone
tunnel.

11. The apparatus of claim 1, said jamming
retainer defining an external taper.

12. The apparatus of claim 1, said jamming
retainer having a bore configured to receive a suture
retainer.

5 13. The apparatus of claim 12, said suture
retainer having a shape complementary to said bore.

14. The apparatus of claim 13, said shape being
tapered.

10 15. The apparatus of claim 12, said suture
retainer and said bore being configured to bind suture
received therebetween.

15 16. The apparatus of claim 15, said body having a
second bore adapted to permit passage of suture from
said bore.

20 17. The apparatus of claim 12, wherein:
the suture received between said suture retainer
and said bore retains the ligament or tendon; and
said body is fixed in the bone tunnel;

whereby tension on the ligament or tendon urges
said suture retainer into said bore.

5 18. A method for fixing a ligament or a tendon in
a bone tunnel comprising:

retaining the ligament or tendon with a jamming
retainer; and

10 securing the jamming retainer in the bone tunnel
whereby substantial proximal migration of the jamming
retainer is prohibited.

15 19. The method of claim 18, further comprising
pulling the jamming retainer through the bone tunnel
with a suture.

20 20. The method of claim 18, further comprising
pushing the jamming retainer through the bone tunnel
with a ligament inserter.

21. The method of claim 18, including:
connecting the ligament or tendon to the jamming
retainer with a suture; and

knotting the suture.

22. The method of claim 18, further comprising
pulling the jamming retainer through the bone tunnel
with one or more free ends of the suture.

23. The method of claim 18, including introducing
the ligament or tendon into a loop or transverse bore
in the jamming retainer.

24. The method of claim 18, including introducing
an interference screw into the bone tunnel, the
interference screw being configured to prohibit passage
of the jamming retainer from the bone tunnel.

25. The method of claim 25, wherein the
interference screw encroaches the wall of the bone
tunnel.

26. The method of claim 25, said interference
screw engaging the jamming retainer.

27. The method of claim 25, said interference screw threadingly engaging the jamming retainer.

5 28. The method of claim 25, said interference screw urging the jamming retainer into the wall of the bone tunnel.

660230#3763760

Abstract

A jamming retainer for fixing a ligament in a bone tunnel without excessive sideways pressure on the ligament that may result in tissue necrosis, the jamming retainer including a substantially rigid body with a bore or loop for receiving a ligament or tendon and a bore or ring for receiving a suture for towing the jamming retainer and ligament or tendon through a bone tunnel. Once positioned, the jamming retainer is fixed in the bone tunnel with an interference screw.

MR/CHAN23.AP6

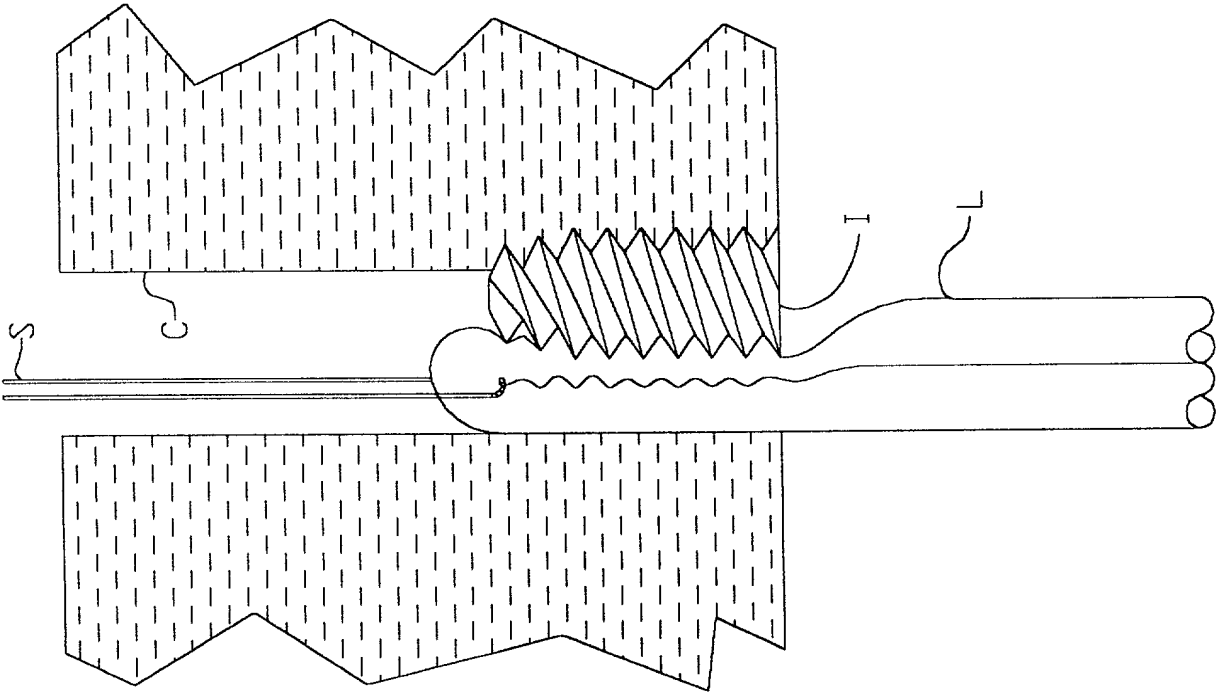


FIG. 1

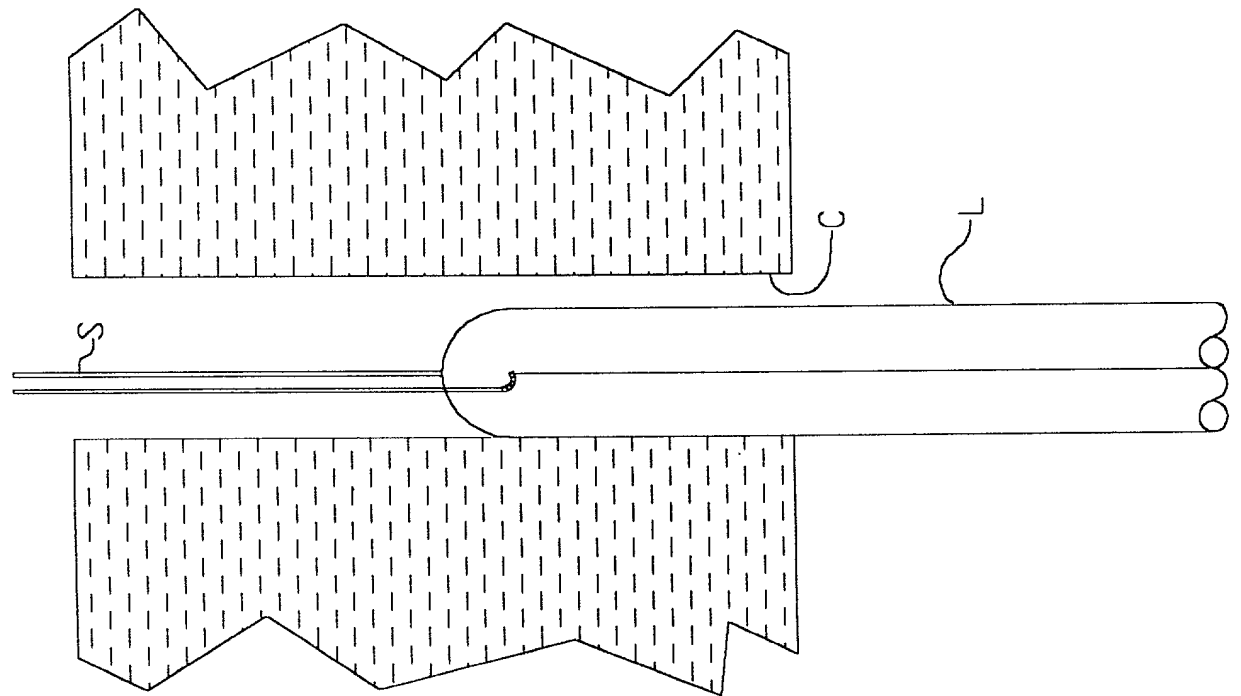


FIG. 2

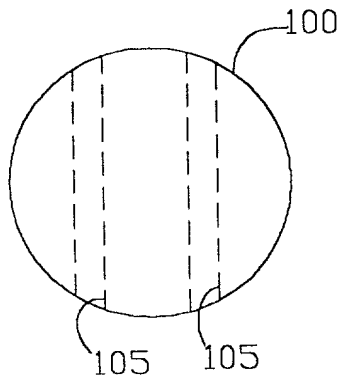


FIG. 3

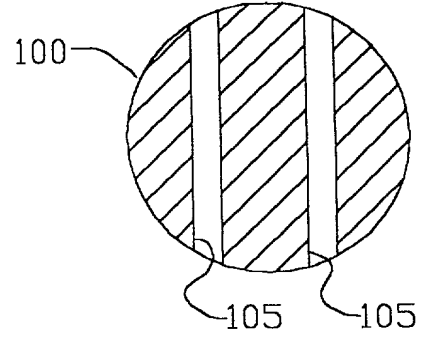


FIG. 4

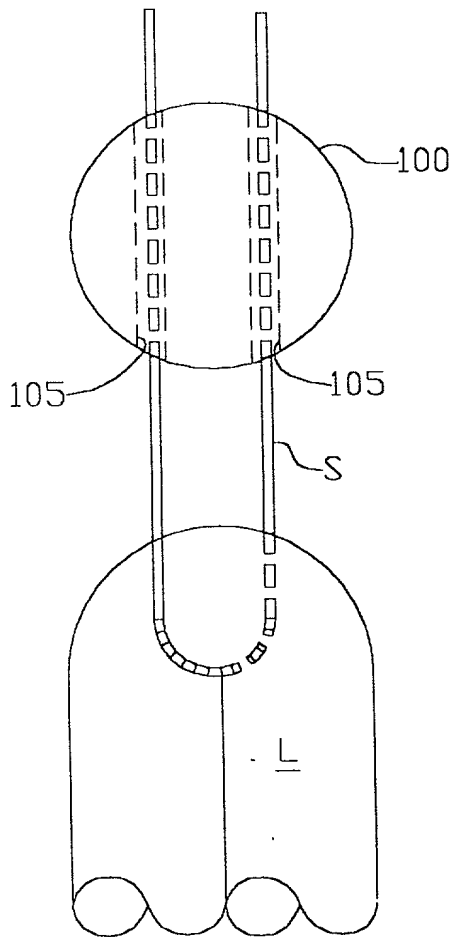


FIG. 5

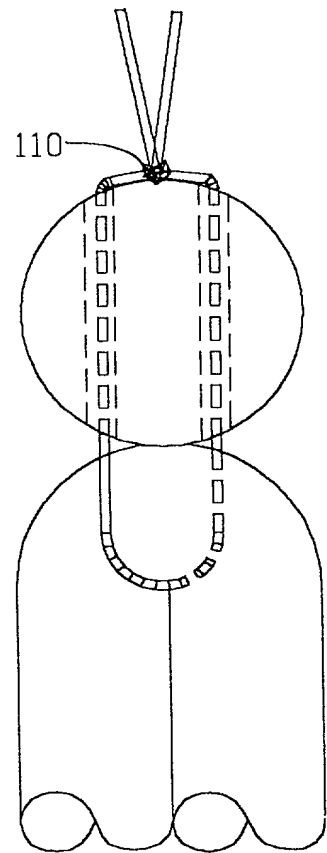


FIG. 6

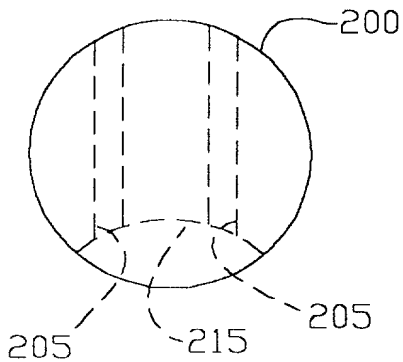


FIG. 9

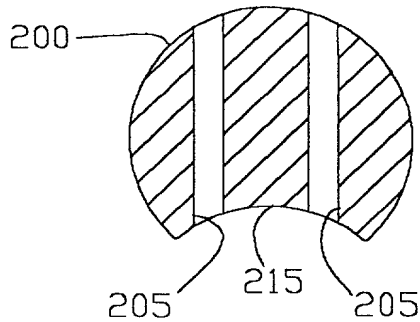


FIG. 10

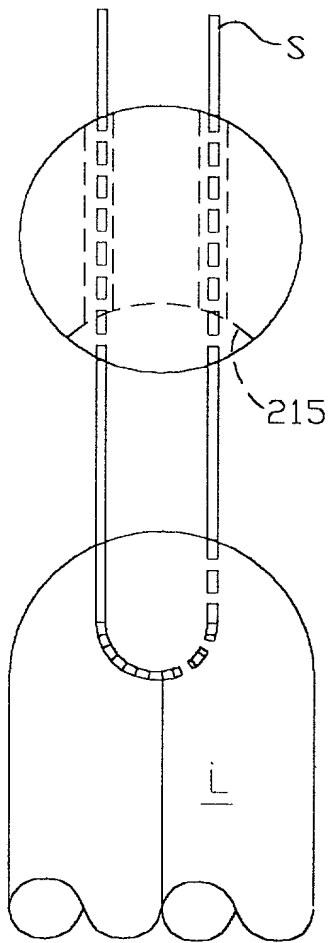


FIG. 11

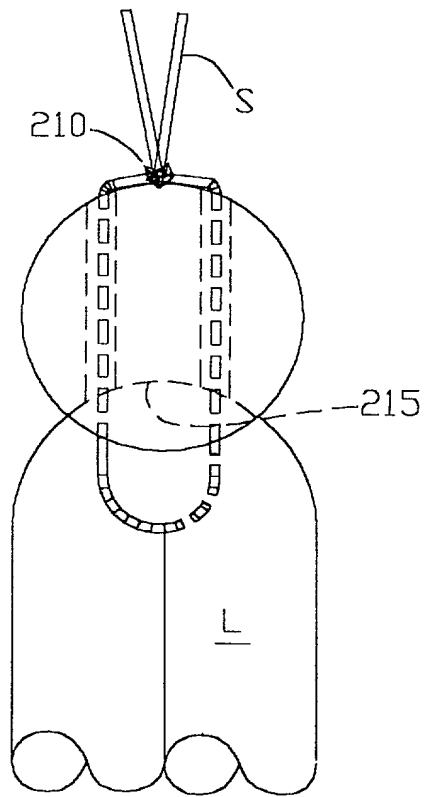


FIG. 12

660250-3T63T660

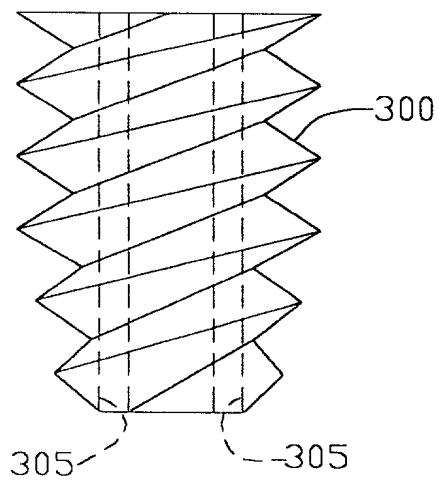


FIG. 13

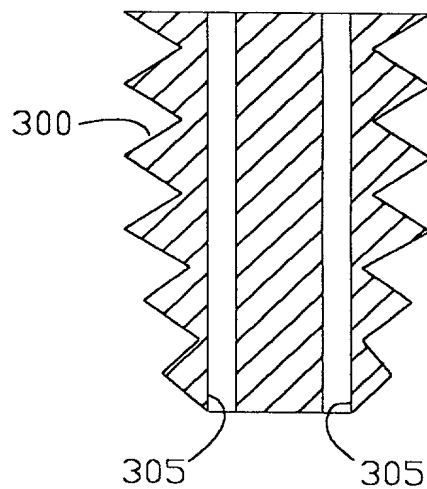


FIG. 14

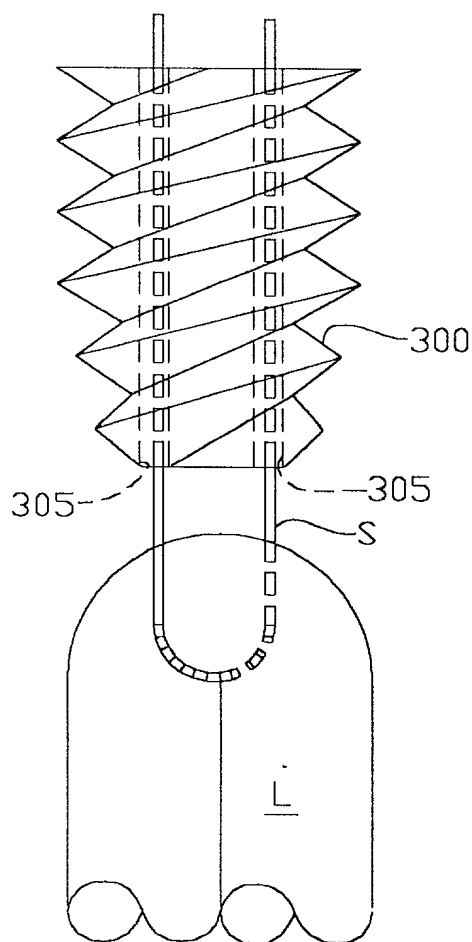


FIG. 15

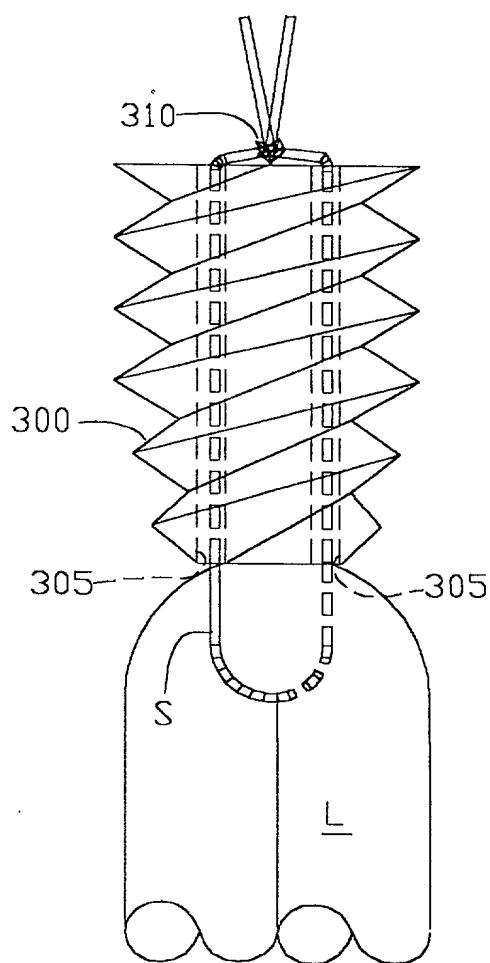


FIG. 16

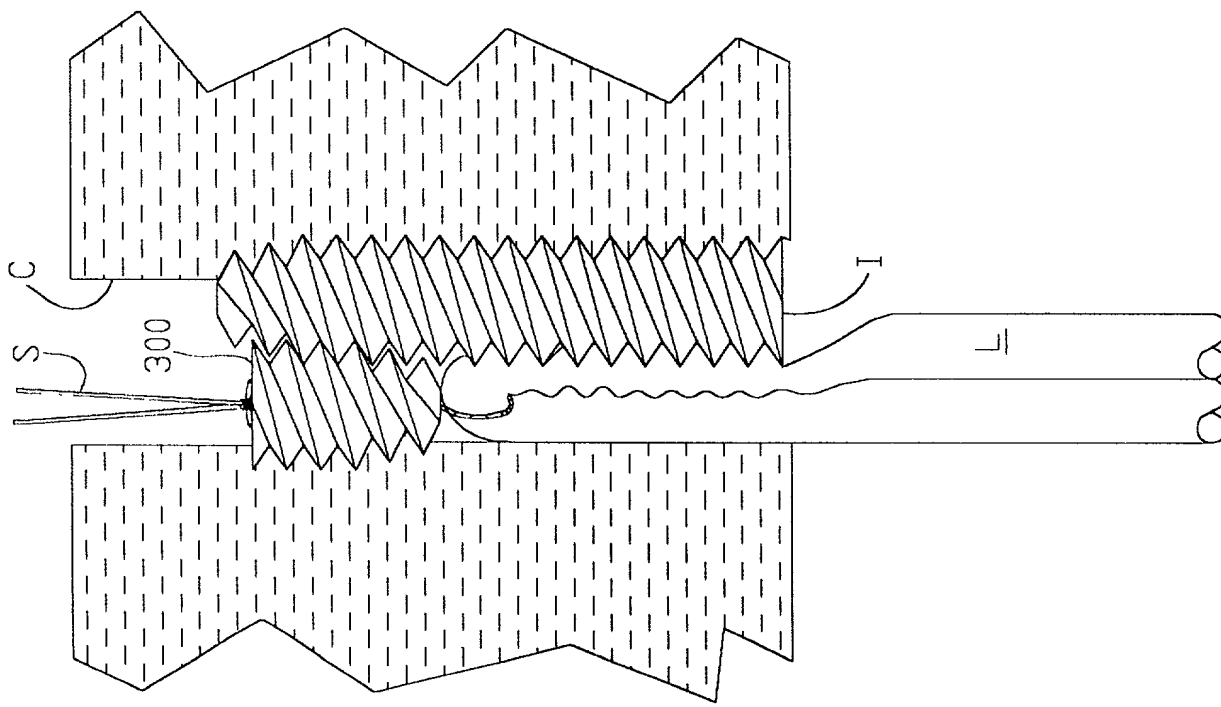


FIG. 18

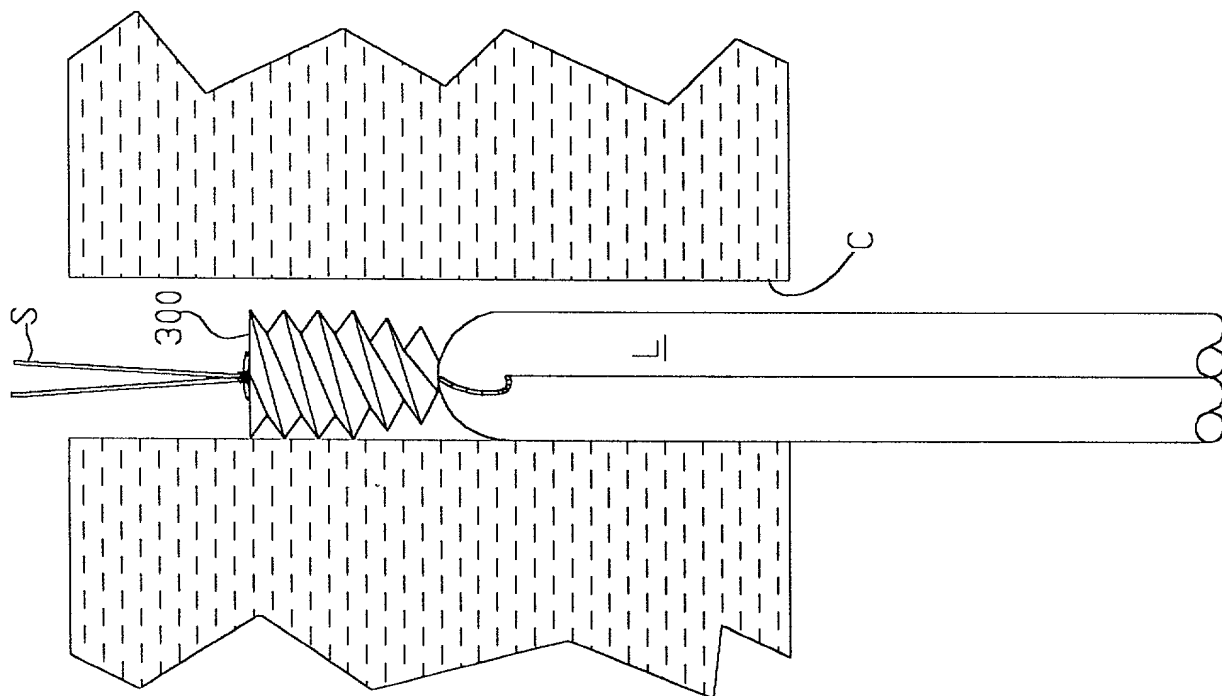
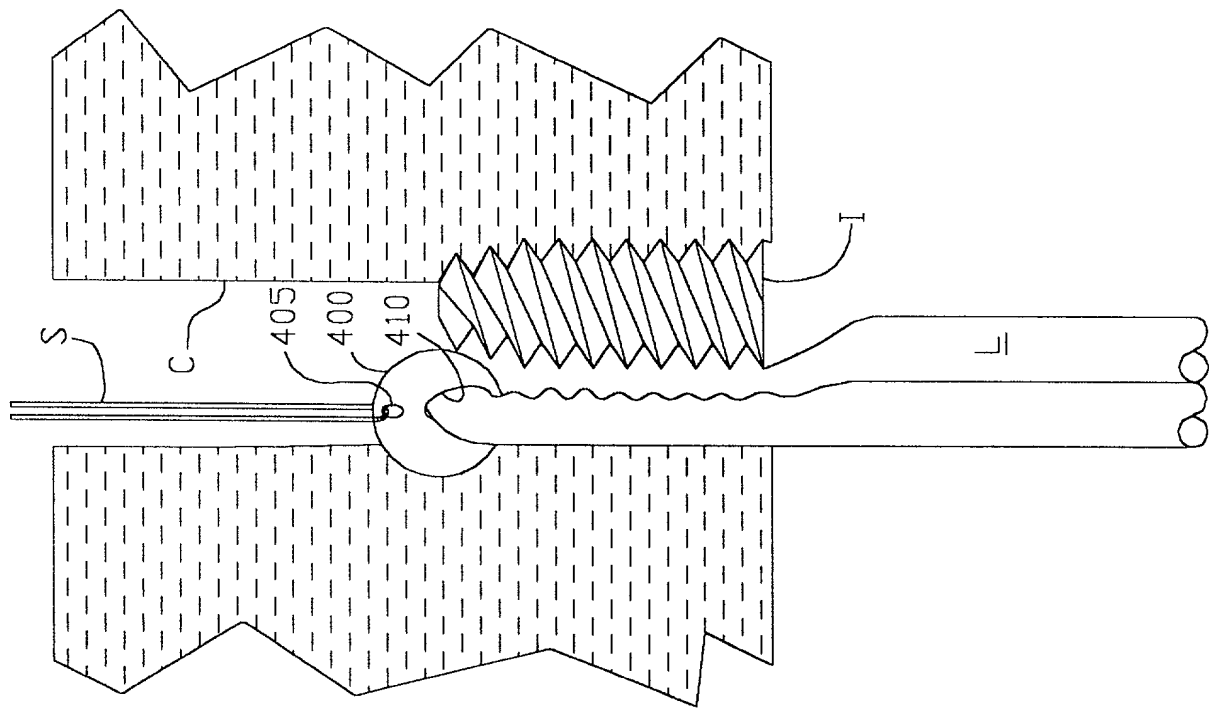
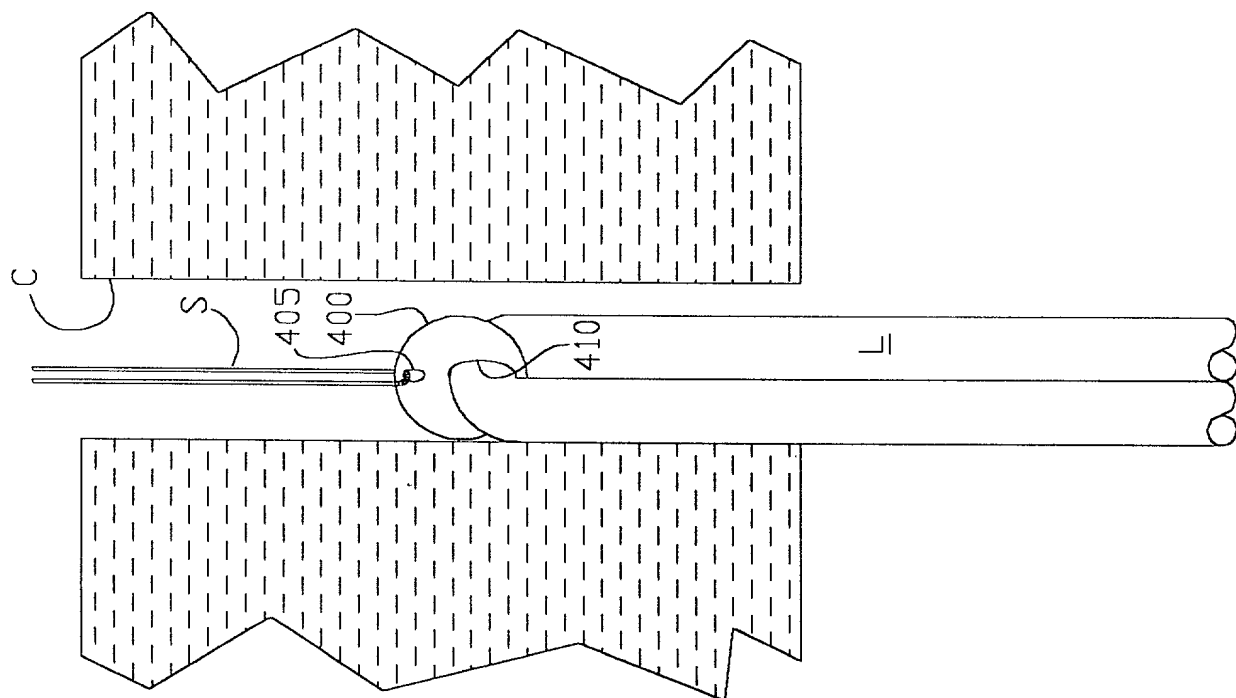


FIG. 17



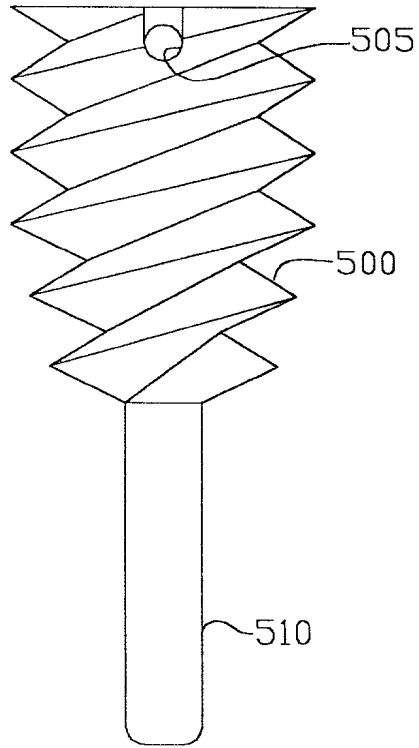


FIG. 21

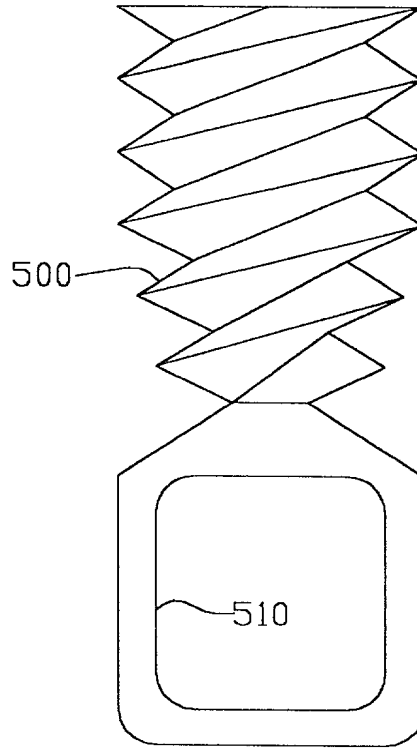


FIG. 22

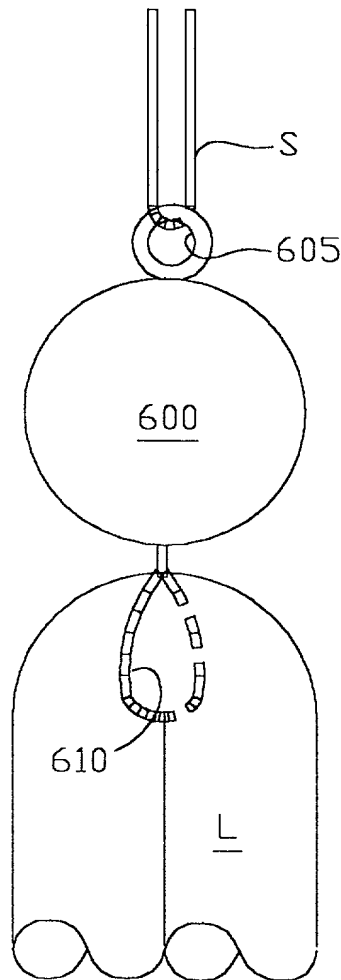


FIG. 23

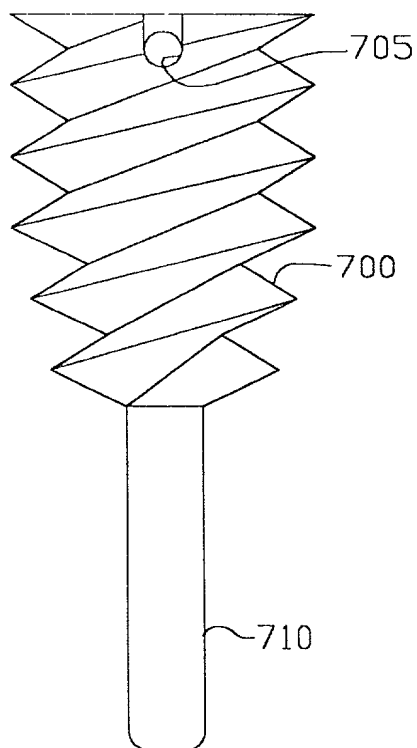


FIG. 24

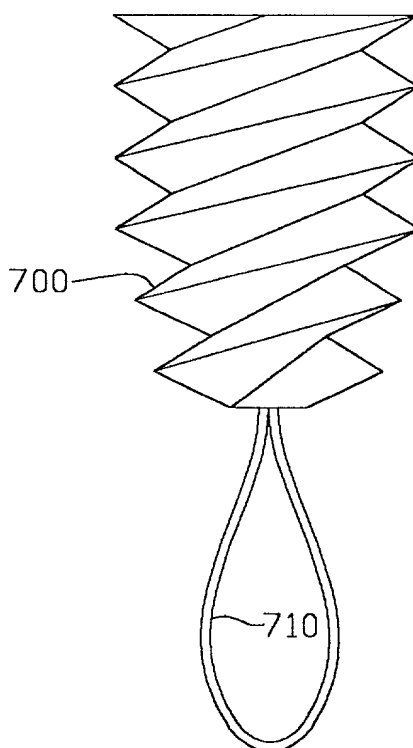


FIG. 25

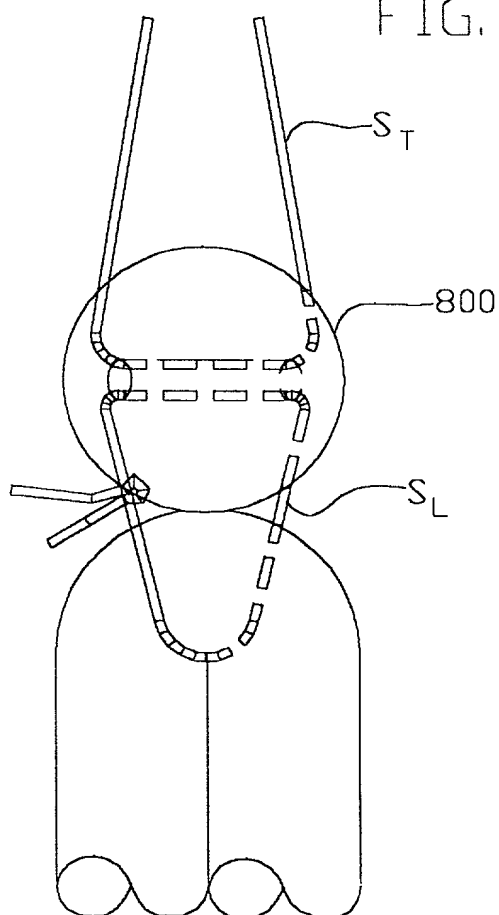


FIG. 26

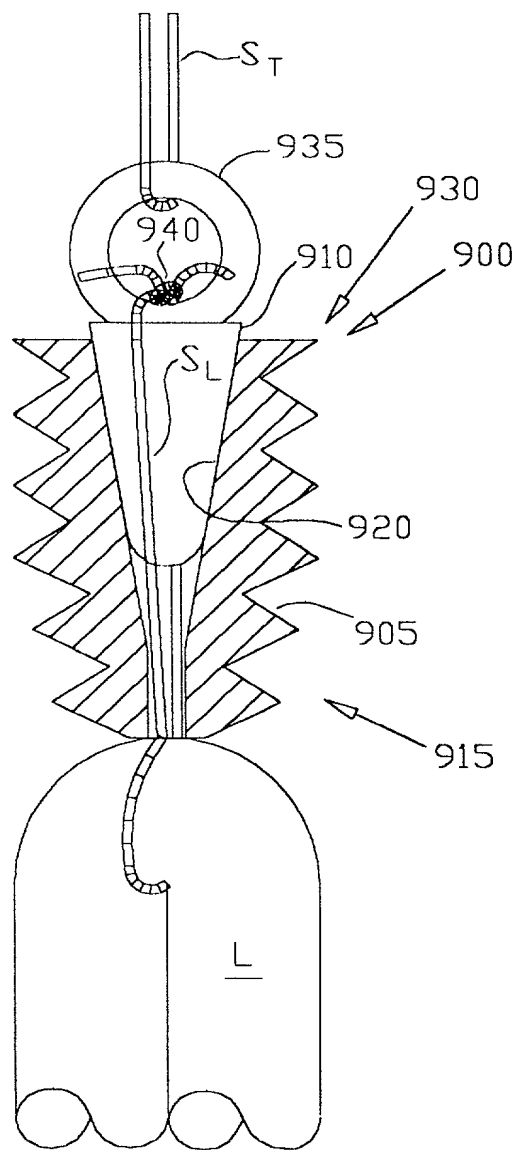


FIG. 27

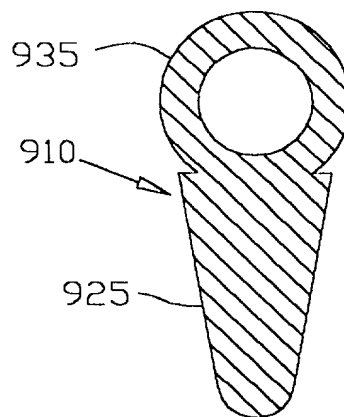


FIG. 28

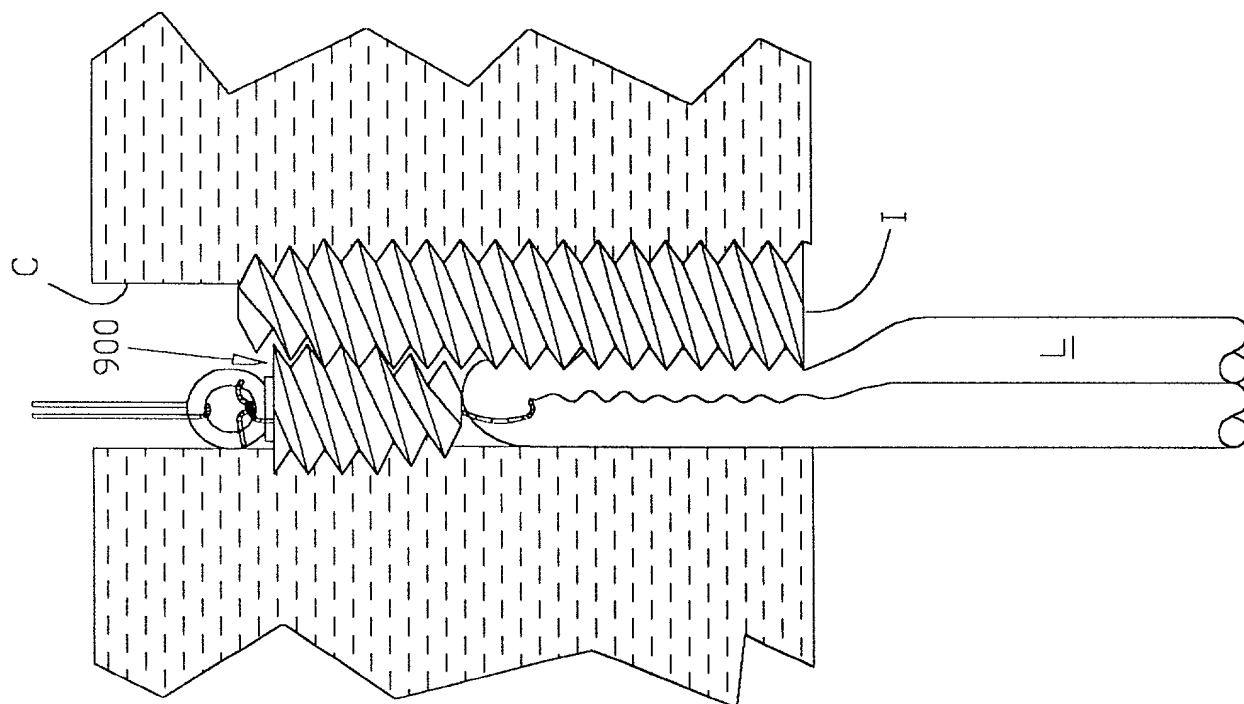


FIG. 30

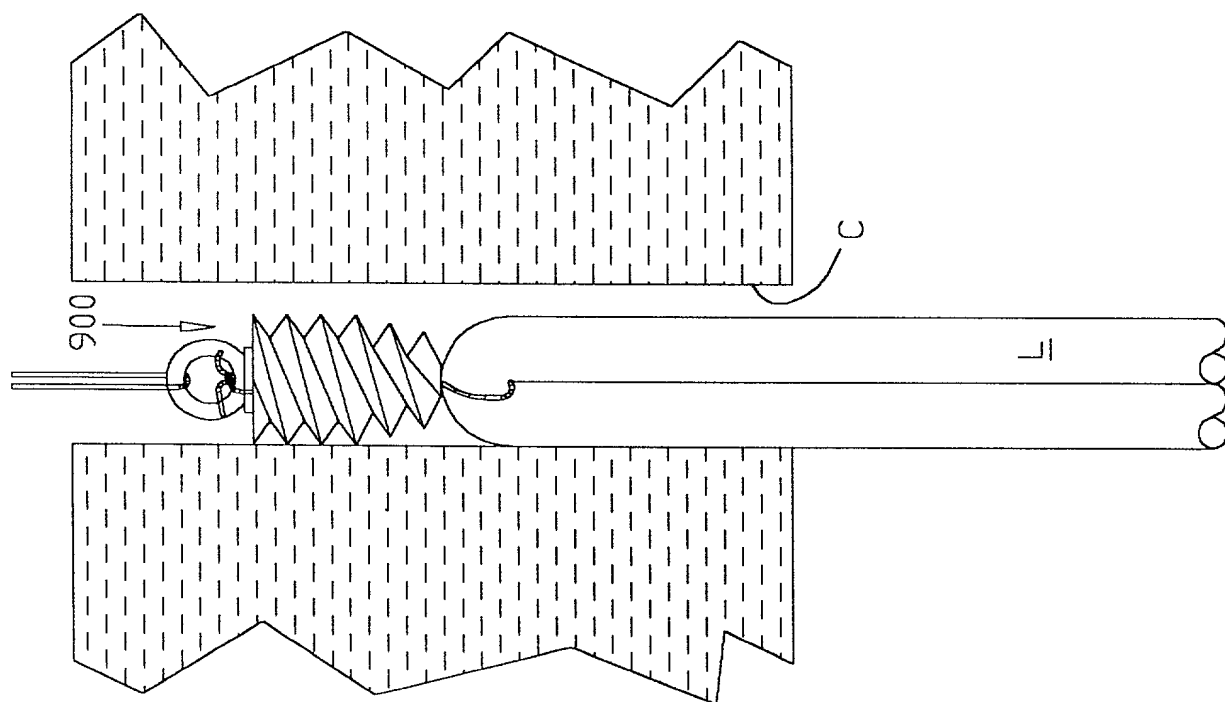


FIG. 29

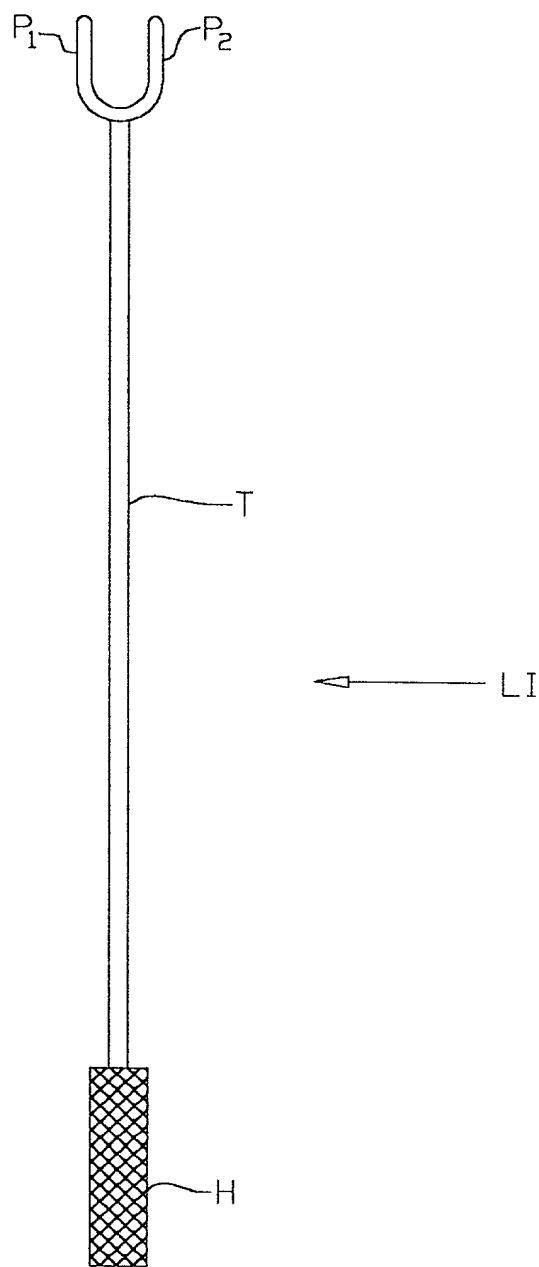


Fig. 31

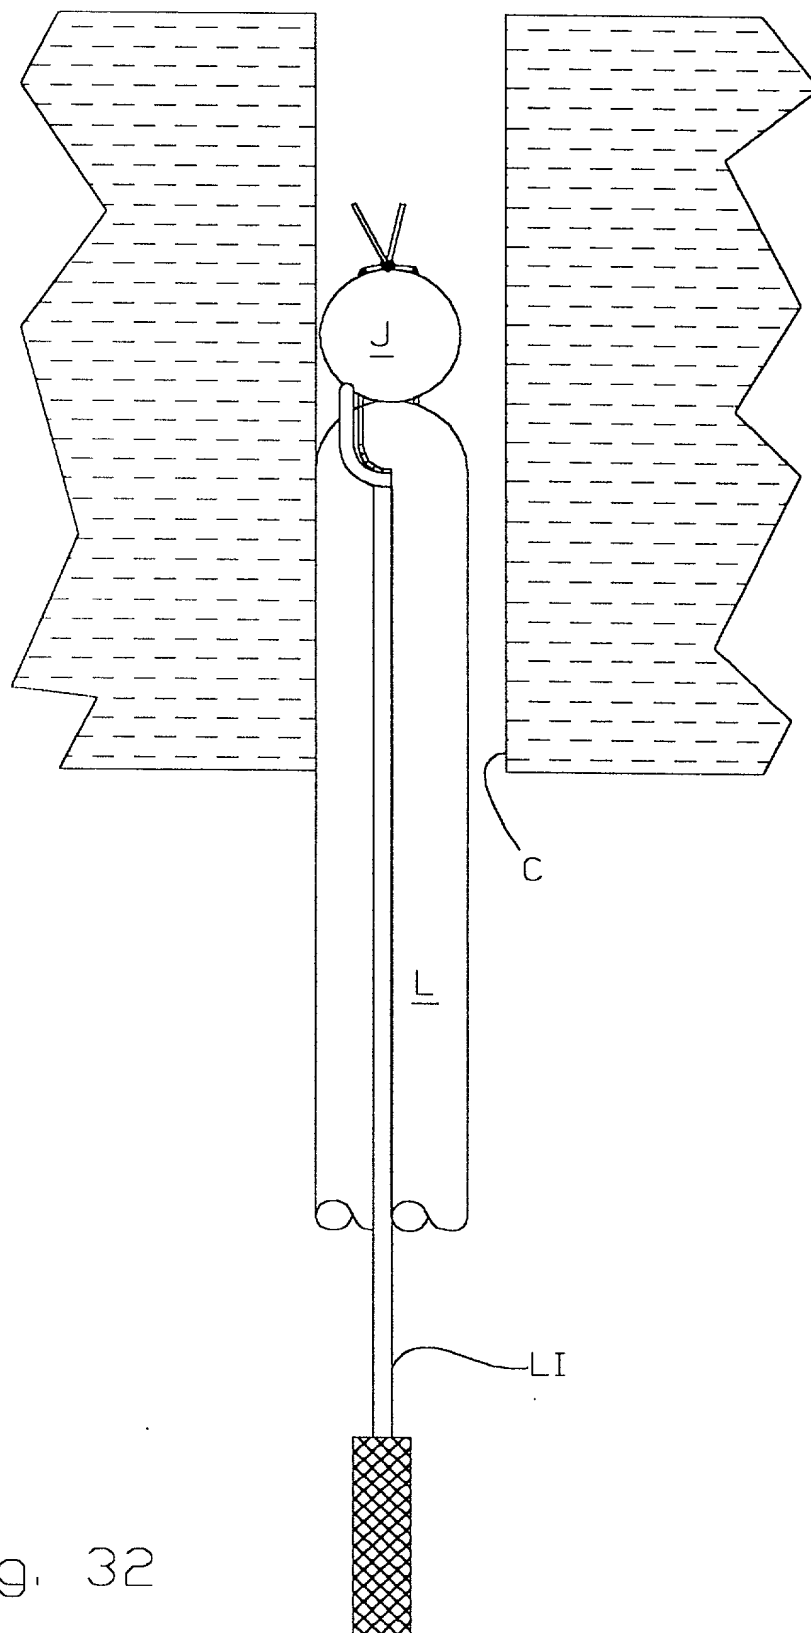


Fig. 32

DECLARATION AND POWER OF ATTORNEY

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled "APPARATUS AND METHOD FOR LIGAMENT FIXATION", the specification of which is filed herewith, and is identified by Attorney's Docket No. CHAN-23.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

CHAN-23

03507650

I hereby claim priority benefits under Title 35, United States Code, Section 119(e), of (1) United States Provisional Patent Application Serial No. 60/086,329, filed 5/21/98 for APPARATUS AND METHOD FOR LIGAMENT FIXATION; and (2) United States Provisional Patent Application Serial No. 60/125,745, filed 3/23/99 for APPARATUS AND METHOD FOR LIGAMENT FIXATION.

I hereby appoint Pandiscio & Pandiscio, a firm composed of Nicholas A. Pandiscio, Registration No. 17293, Mark J. Pandiscio, Registration No. 30883, Scott R. Foster, Registration No. 20570, and William A. Bonk, III, Registration No. 40,521, or any of them, of 470 Totten Pond Road, Waltham, Massachusetts 02451-1914, (Telephone No. 781-290-0060), my attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Inventor's signature: Kwan-Ho Chan
Inventor's full name: Kwan-Ho Chan
Date: May 19, 1999
Residence: 4803 1st Place,
Lubbock, Texas 79410
Post Office Address: Same
Citizenship: Canada

MF/CHAN23.DEC

60050-016560

CHAN-23